


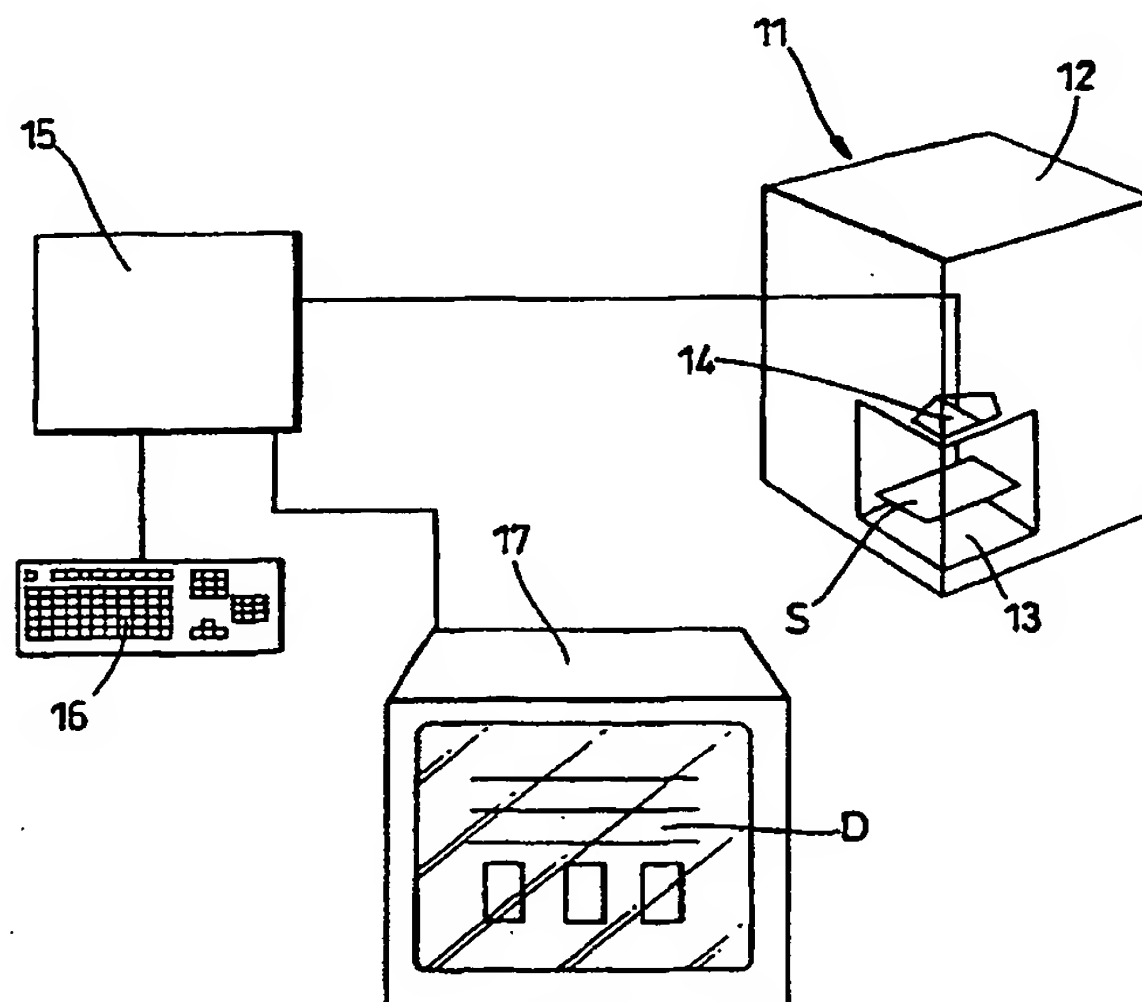

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : G01J 3/46, 3/52	A1	(11) International Publication Number: WO 00/45141 (43) International Publication Date: 3 August 2000 (03.08.00)
(21) International Application Number: PCT/GB00/00240 (22) International Filing Date: 31 January 2000 (31.01.00) (30) Priority Data: 9901960.6 29 January 1999 (29.01.99) GB (71)(72) Applicant and Inventor: MAY, Richard [GB/GB]; Mays Carpets, Marcham Road, Abingdon, Oxon OX14 1BS (GB). (74) Agent: ROCK, Olaf, Colin; Rock and Company, Trelawn, Cassington, Witney, Oxon OX8 1DN (GB).		(81) Designated States: US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i>

(54) Title: COLOUR IDENTIFICATION METHOD AND APPARATUS**(57) Abstract**

A method of generating colour based information from a sample comprising the steps of: putting the sample into a condition where it can be scanned to provide consistent colour and light information in the form of parameters (such as information relating to hue, tone and light intensity); scanning the sample to establish first value/s of the required parameter/s according to a given first range of such parameters; generating from the first value/s second value/s of the parameter/s lying in a second range of such parameters either on the basis of a one-to-one relationship between at least a part of the first range and the second range or on the basis of some other relationship or relationships between the first and second range; displaying some or all the first value/s or the second value/s or of functions of the first or second values.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

COLOUR IDENTIFICATION METHOD AND APPARATUS

TECHNICAL FIELD

This invention relates to an identification method and apparatus.

5

BACKGROUND ART

In modern industries it is known to make use of colour standards and scales to ensure that the colour or colours of an item can be accurately identified. Typically this enables a colour of an article to be defined so as to be able to reproduce the colour to a particular level of accuracy in another context say for matching one colour scale for carpet with another colour scale say for curtains.

The use of computers in the production of printed, dyed and photographic products and reproduction has lead to a need for accurate colour reproduction. The steps involved in a change from design to finished product has lead to a need for accurate colour matching. Typically colour matching arises in connection with the use of colour monitors which provide colour images which need to be translated from what is shown on the screen into printed or dyed end products. When a printed reproduction of an image on a screen is required the colours are converted from the red, green, blue ('RGB') colour spectrum of the screen to a cyan, magenta, yellow and black ('CMYK') colour spectrum used in operating a printer. Such a conversion step is carried out during the printing process but the conversion does not necessarily take into account, to an acceptable extent, the different colours a screen and a printer can display and as a result the image produced from a colour printer can differ significantly from an original image on the screen. Software algorithms exist for improved conversion accuracy from RGB to CMYK spectra. Research to enable a sufficiently accurate definition of the colour of an original piece of material (such as artwork, photograph, fabric or textile), to be converted into an end product (such as magazine page, engraving, curtaining, dyestuff) has resulted in a number of commercial available products for colour matching. These include: 'PANTONE' (RTM) typically for reproduction of colour in relation to documents, computers and in communications contexts; 'CHROMATONE' (RTM) typically for textiles; and 'DULUX'

typically for paints. They all involve identifying an initial colour so in subsequent production, reproduction or information transmission steps an original colour can be defined in terms of a number of parameters which can be subsequently used in reproduction processes, which can include digital processing, as well as manufacturing processes such as printing, textile dyeing or colouring of plastics material involving polymerisation.

Colour is frequently defined in terms of three parameters: hue, tone (lightness/darkness) and intensity.

DISCLOSURE OF INVENTION

According to a first aspect of the present invention there is provided a method of generating colour based information originating from a sample comprising the steps of:

- 1 putting the sample into a condition where it can be scanned to provide consistent colour and light information in the form of parameters (such as information relating to hue, tone and light intensity);
- 2 scanning the sample to establish first value/s of the required parameter/s according to a given first range of such parameters;
- 3 generating from the first value/s second value/s of the parameter/s lying in a second range of such parameters either on the basis of a one-to-one relationship between at least a part of the first range and the second range or on the basis of some other relationship or relationships between the first and second range;
- 4 displaying some or all of the first value/s or the second value/s or of functions of the first or second values or combinations of the first and second values or of functions thereof either directly or in the form of a virtual or other image.

According to a first preferred version of the first aspect of the present invention there is provided a further generating step involving the generation of at least third value/s of the parameter/s in a third range of such parameters either on the basis of a one to one relationship between the first and/or second range and the third range or on the basis of

some other relationship between the first and/or the second range and displaying some or other of the first, second, third values or functions of these or combinations of the values

According to a second aspect of the present invention there is provided an apparatus for
5 providing information relating to a sample comprising:

a locating means adapted to locate a sample from which information is required;

a scanner mounted relative to the locating means and adapted so as to be able to scan a sample located by the locating means and to provide as output information relating to the colour of the located sample;

10 a processor adapted to receive output information from the scanner in relation to a first range of such parameters; to generate second value/s of the parameter/s in terms of a second range of such parameters either on the basis of a one-to-one relationship between the first range and the second range or on the basis of some other relationship or relationships between the first and second range; and

15 display or transmission means whereby some or all of the first values or the second values or functions of the first or second values or combinations of the first and second values or of functions thereof can be displayed or transmitted either as information or in the form of a virtual or other image.

20 According to a first preferred version of the second aspect of the present invention the processor is further adapted to generate of at least third value/s of the parameter/s in terms of a third range of such parameters either on the basis of a one-to-one relationship between the first and/or second range and the third range or on the basis of some other relationship or relationships between the first and/or the second range and the display or
25 transmission means serve to displaying or transmit some or all of the first, second, or third values or of functions of the first second or third values or combinations of the first second or third values or functions thereof can be displayed or transmitted either as information or in the form of a virtual or other image.

30 According to a third aspect of the present invention there is provided a display unit having a display screen and adapted to display on a first region or regions of the screen a

first image and on a second region or regions of the screen the information displayed by or transmitted from the apparatus according to the second aspect of the present invention or the first preferred version thereof.

The matter of accurate identification and reproduction of colour is a particular problem in retail trades where a need often arises for sample provided by a customer, say for a carpet, needs to be related to other textiles, such as curtains or relating to furniture or to other materials such as wall coverings or decorations and not merely from the point of view of direct colour matching but also in relation to at least one contrasting colour.

10 BRIEF DESCRIPTION OF DRAWINGS

Exemplary embodiments of the invention will now be described with reference to the accompanying block diagrams of colour information handling units of which:

Figure 1 is of a basic unit and

Figure 2 is of a more elaborate unit for use in subjective consideration of a product in an environment.

MODE FOR CARRYING OUT THE INVENTION

Figure 1 shows a colour information handling unit 11 comprises a housing 12 with a chamber 13 for receiving a sample S about which colour information is required to enable the colour to be identified for use in connection with a later product. Scanner 14 for measuring light reflectance is mounted to sweep the chamber 13 able to scan a sample located by the locating means and to provide as output information relating to the colour of the located sample. If necessary the sample can be combined with a mounting means which serves to render the scanning information more consistent or reproducible.

In the present case the sample is assumed to be a piece of curtain fabric having a colour which the customer wishes to relate to carpet and a wall paper. The output of the scanner 14 is fed to a computer 15 which is also connected to a keyboard 16 and video display unit 17. The computer 15 contains a working memory adapted to receive output information from the scanner 14 in relation to a first scale of such parameters (say in light reflectance

scale). The computer 15 also contains in its memory a second scale of such parameters (say calibrated on a Chromatone (RTM) scale). On the input of the reflectance information in terms of the first scale of parameters corresponding values are computed on the second scale. The relationship between the first and second scale can be a simple one-to-one relationship or some other more complex. relationship. If necessary the program can call for further information, which can be entered by way of the keyboard or from existing stored data to facilitate the required output.

Having completed the necessary computation the results are shown as a display D in appropriate form on the video display unit 18. The form of the display D depends on the eventual function of the computation as will be referred to later in connection with Figure 2. Typically given that the first scale defines parameters in terms of a reflectance colour scale and the second scale identifies the appropriate parameters for textile colouring then a further processing step by the computer can provide further information such as, for example, to the availability and stock position in a central carpet warehouse or the location of the selected textile. If necessary the program can be used for initiating further more detailed action such as the preparation and transmission of an order or other instruction relating to the amounts, material and dates to be met.

Two colour scales are here referred to (for a reflectance colour scale and a textile scale). Further or alternative scales can also be included such as Pantone (RTM) for providing for the appropriate colour printing of brochures or advertising material so as to provide for an accurate colour reproduction in a brochure or catalogue or for a particular type of display or television system.

Figure 2 shows a development of the system described in connection with Figure 1. The unit of Figure 1 is shown as outline I.

A carpet showroom computer unit 21 is linked to a video display unit ('VDU') 22 and to the unit I. The unit 21 provides for the VDU 22 to display a variety of room settings in colour except for painted or furnishing items such as walls, curtains, carpet and

upholstery which are shown in black or white outline. Given the insertion of a customers sample in the unit I as described in connection with Figure 1 the Unit I can be used to transmit to the unit 21 colour parameters to enable the relevant black or white outline to be appropriately coloured with an accurate representation of the colour involved. In this way a customer can be provided with an accurate representation of a possible layout for the virtual room on display.

If necessary the computer unit 21, or unit I, can contain a program including a colour circle and to provide for a selected colour to be related to another colour or other colours on the colour circle. In this way complementary or other colours or finishes relating to a selected colour can be demonstrated. The programs involved can also be readily adopted to provide for the effect of various types of lighting such a natural or artificial filament or discharge lighting, or combinations of these, and for the effect of changes in lighting at different times of the day.

15

INDUSTRIAL APPLICABILITY

The invention provides a method and means for readily establishing requirements that can be identified in terms of parameters in one colour scale to be readily transcribed into those of another such scale or scales for a range of different product types which need to be reconciled with one another. This can be particularly significant in a context where subjective judgement arises in connection with what can be a visually complex display under a range of lighting conditions.

The exemplary embodiment describes an application of the invention in terms of colour parameters (broadly hue, tone (lightness/darkness) and intensity. For practical purpose other parameters may be added to these for the purpose of ensuring that other associated features relating to the overall appearance of a coloured article are transmitted. Typically an appearance can be metallic, matte or glossy, smooth or fibrous or woven.

25

CLAIMS

1 A method of generating colour based information originating from a sample characterised by the steps of:

5 putting the sample into a condition where it can be scanned to provide consistent colour and light information in the form of parameters (such as information relating to hue, tone and light intensity);

scanning the sample to establish first value/s of the required parameter/s according to a given first range of such parameters;

10 generating from the first value/s second value/s of the parameter/s lying in a second range of such parameters either on the basis of a one-to-one relationship between at least a part of the first range and the second range or on the basis of some other relationship or relationships between the first and second range;

15 displaying some or all of the first value/s or the second value/s or of functions of the first or second values or combinations of the first and second values or of functions thereof either directly or in the form of a virtual or other image.

2 A method as claimed in Claim 1 characterised by an additional generating step involving the generation of at least third value/s of the parameter/s in a third
20 range of such parameters either on the basis of a one to one relationship between the first and/or second range and the third range or on the basis of some other relationship between the first and/or the second range and displaying some or other of the first, second, third values or functions of these or combinations of the values.

25 3 An apparatus for providing information relating to a sample characterised by:
a locating means adapted to locate a sample from which information is required;

30 a scanner mounted relative to the locating means and adapted so as to be able to scan a sample located by the locating means and to provide as output information relating to the colour of the located sample;

a processor adapted to receive output information from the scanner in relation to a first range of such parameters; to generate second value/s of the parameter/s in terms of a second range of such parameters either on the basis of a one-to-one relationship between the first range and the second range or on the basis of some other relationship or relationships between the first and second range; and

display or transmission means whereby some or all of the first values or the second values or functions of the first or second values or combinations of the first and second values or of functions thereof can be displayed or transmitted either as information or in the form of a virtual or other image.

4 Apparatus as claimed in Claim 3 wherein the processor is further characterised by being adapted to generate of at least third value/s of the parameter/s in terms of a third range of such parameters either on the basis of a one-to-one relationship between the first and/or second range and the third range or on the basis of some other relationship or relationships between the first and/or the second range and the display or transmission means serve to displaying or transmit some or all of the first, second, or third values or of functions of the first second or third values or combinations of the first second or third values or functions thereof can be displayed or transmitted either as information or in the form of a virtual or other image.

5 A display unit having a display screen and adapted to display on a first region or regions of the screen a first image characterised by being further adopted to display on a second region or regions of the screen the information displayed by or transmitted from apparatus as claimed in Claim 3 or Claim 4.

1/2

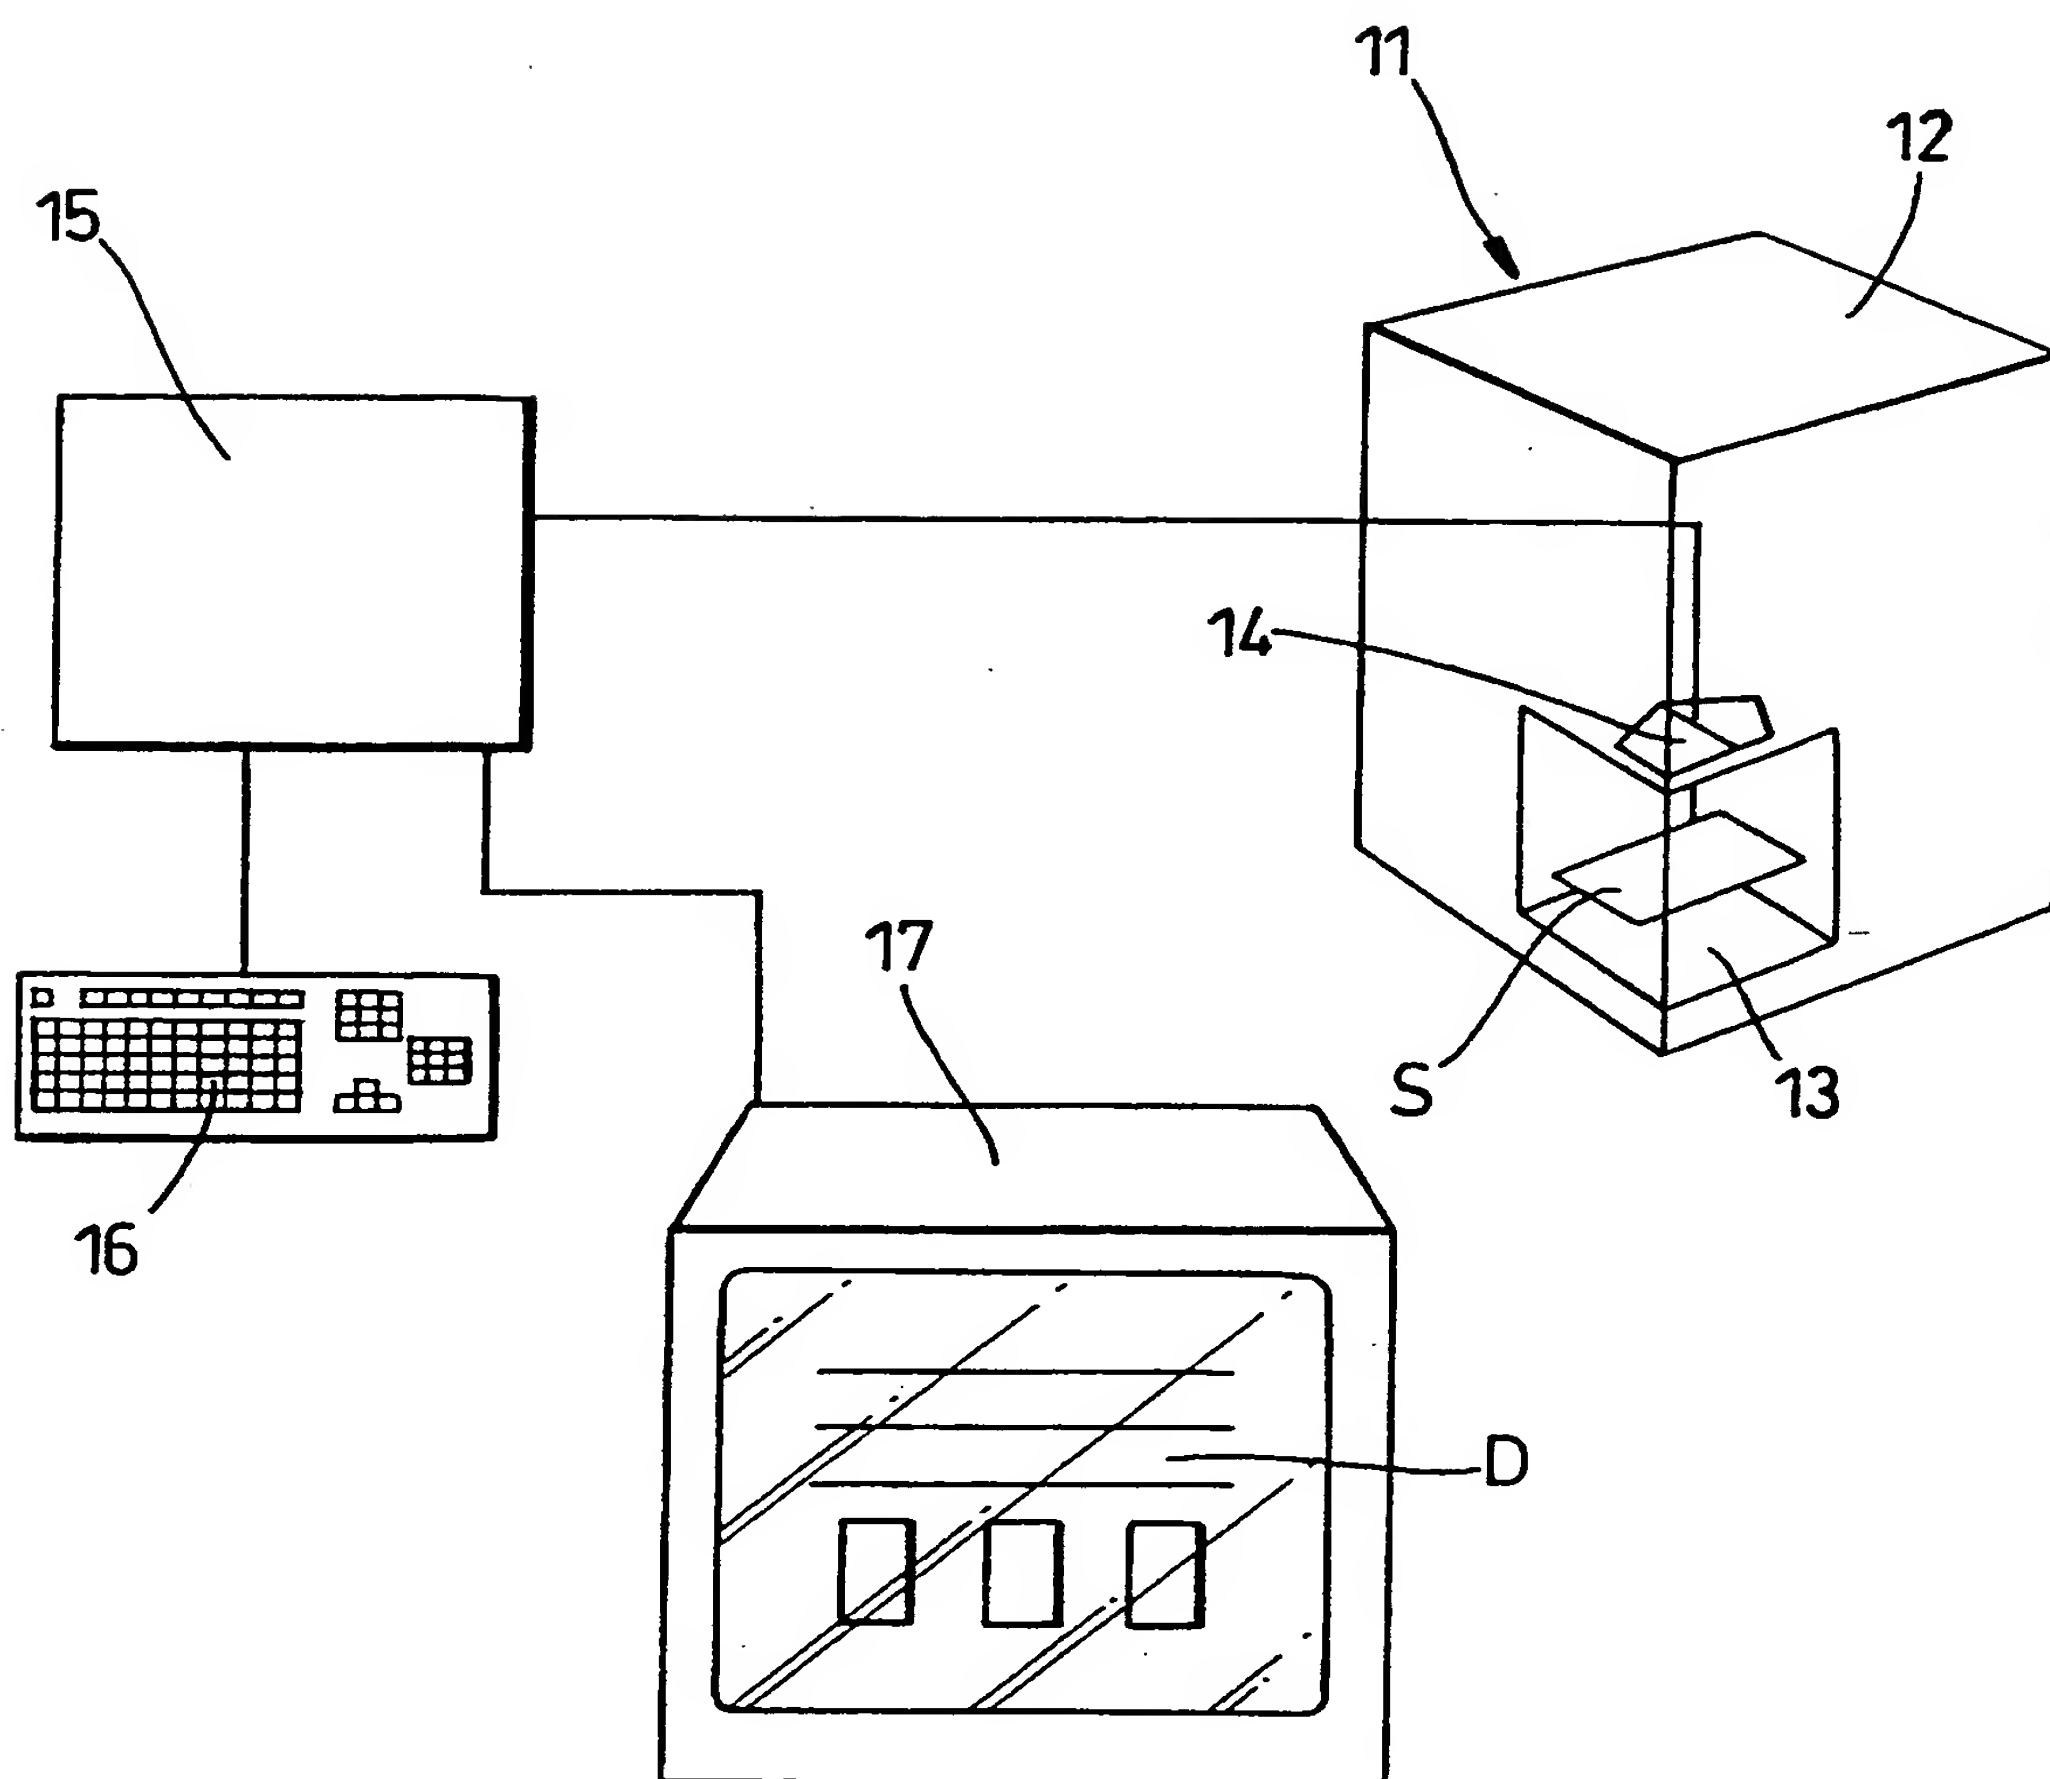
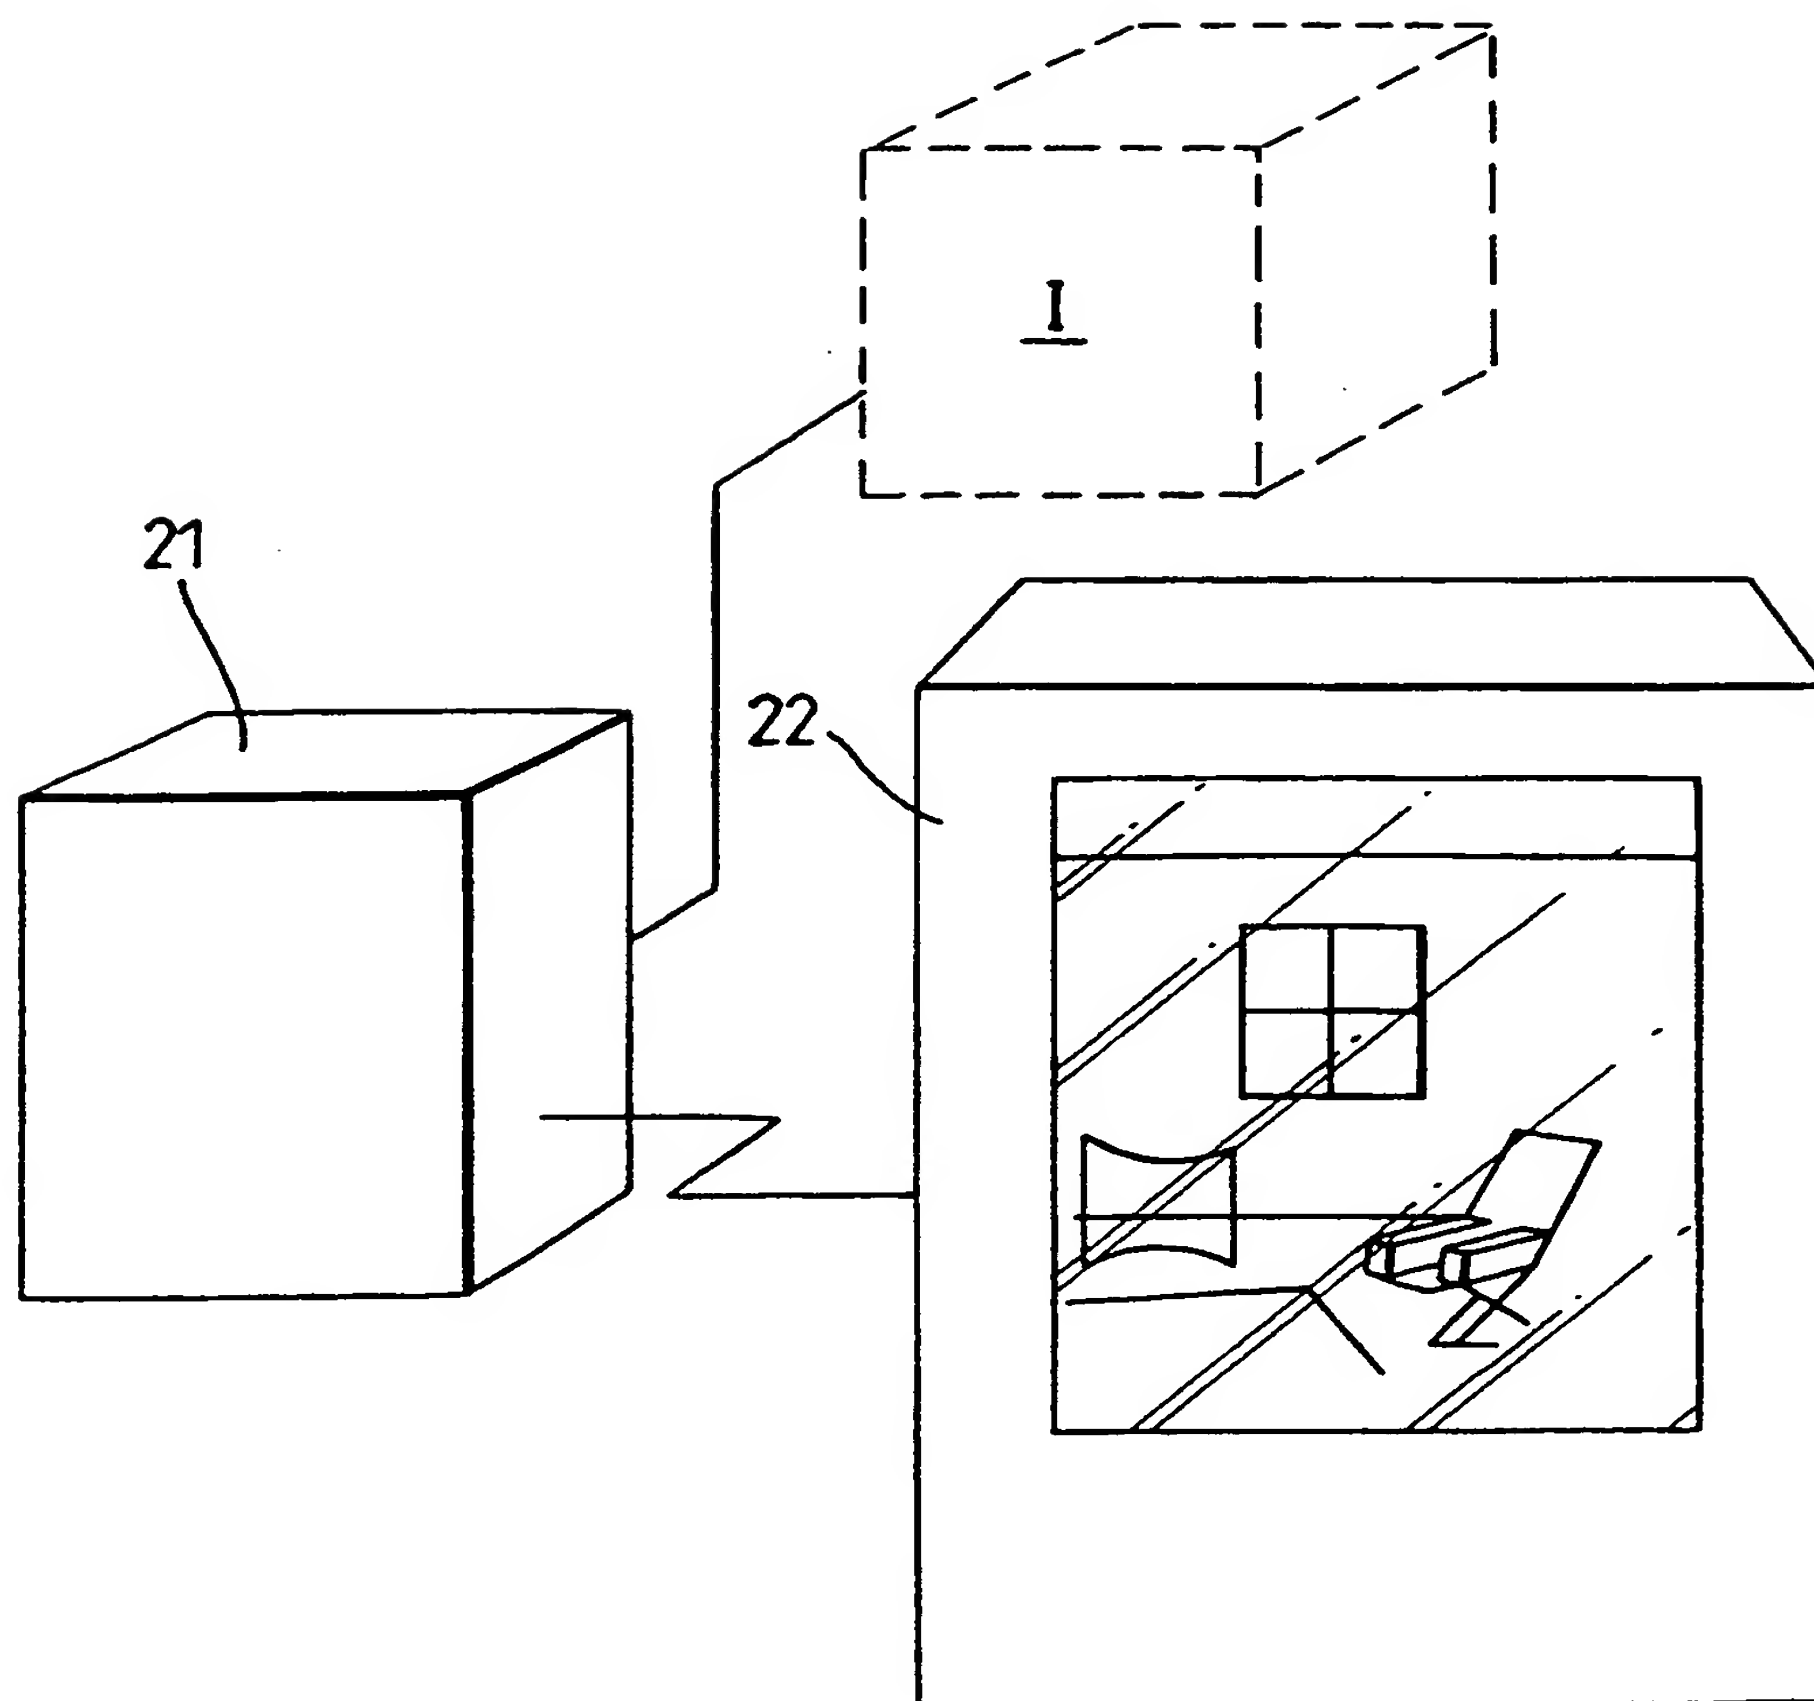


Fig. 1

2/2

***Fig. 2***

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 00/00240

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G01J3/46 G01J3/52

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G01J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 762 093 A (MILLIKEN RES CORP) 12 March 1997 (1997-03-12) page 2, line 43 -page 5, line 25 page 12, line 56 -page 17, line 3 figure 1	1-5
A	US 5 798 943 A (COOK ROBERT L ET AL) 25 August 1998 (1998-08-25) column 2, line 60 -column 5, line 21 column 7, line 66 -column 8, line 20	1-5

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

19 April 2000

Date of mailing of the international search report

28/04/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Jacquin, J

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 00/00240

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0762093 A	12-03-1997	AU 3396693 A	07-10-1993
		AU 670012 B	27-06-1996
		AU 8022494 A	09-02-1995
		CA 2091155 A	28-09-1993
		EP 0562745 A	29-09-1993
		JP 6109544 A	19-04-1994
		NZ 247247 A	26-07-1995
		US 5375193 A	20-12-1994
		US 5428720 A	27-06-1995
US 5798943 A	25-08-1998	US 5680327 A	21-10-1997